



# SARGOM

articoli gomma e plastica tecnico-industriali


Sargom s.r.l. via G.Bertoli, 15

25050 Rodengo Saiano (Bs)

Tel.030/317741-6810320 - Fax 030/320882

**Scheda tecnica** (conforme a scheda produttore)

Distribuita da SARGOM S.R.L.

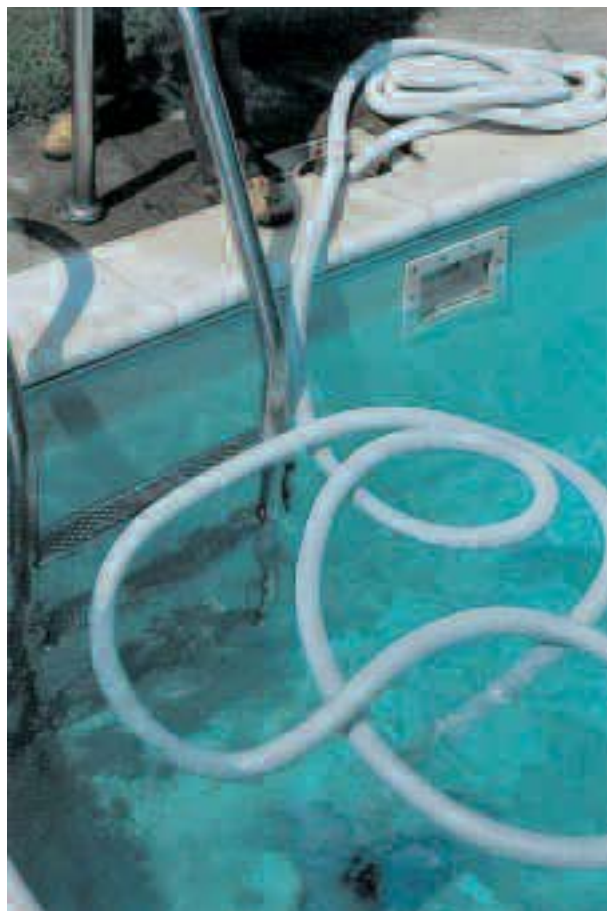

Ø int. I. D. Ø int. Ø int. mm.	Ø est. O. D. Ø ext. Ø ext. mm.	peso weight Peso poids gr./mtr.	raggio curv. bending radius Radio curv. rayon courb. mm.	sottovuoto vacuum Vacío vide m. H <sub>2</sub> O	lungh. rotoli coil length Long. rollos long. couronnes mtr.
32	40,6	160	85	5	30
38	48	250	100	5	30
50	61	330	130	5	30

## CARATTERISTICHE

Superficie interna praticamente liscia, ottimo galleggiamento.

Practically smooth inside, excellent floating properties.

Superficie interior prácticamente lisa, óptima flotación.

Pratiquement lisse à l'intérieur, très flottant.

## USO


Impianti pulizia piscine. Fornito anche con manicotti.

Applications: swimming-pool cleaning. Supplied also with cuffs.

Instalaciones de limpieza en piscinas. Suministrado también con maniguitos.

Utilisations: pour nettoyage des piscines. Livré aussi avec embouts.

## STRUTTURA

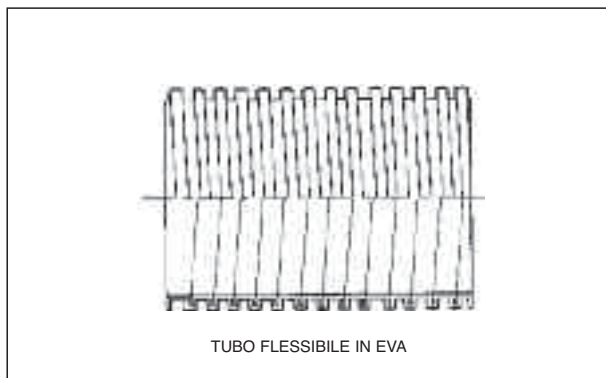

TUBO FLESSIBILE IN EVA



In EVA (etil-vinil-acetato).

Made of EVA (ethyl-vinyl-acetate).

Fabricado en EVA (etil-vinil-acetato)

En EVA (éthyl-vinyle-acetate).