
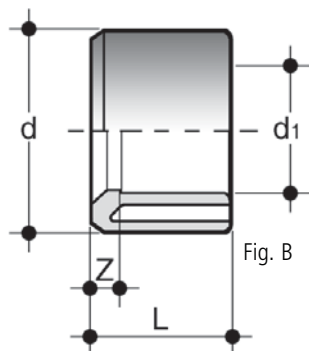


BUSSOLA DI RIDUZIONE
 estremità maschio per incollaggio
 (d) estremità a bicchiere per incol-
 laggio (d₁ ridotto)

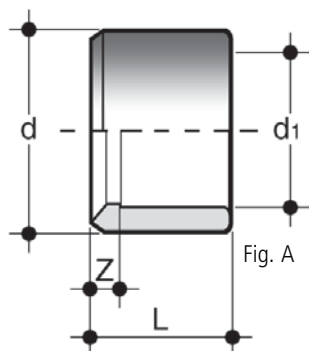

REDUCING BUSH
 spigot for solvent welding (d)
 socket for solvent welding (reduced
 d₁)

REDUCTION SIMPLE
 male à coller sur le d, femelle à
 coller sur le d₁ réduit

REDUKTION
 kurz, mit Klebestutzen und
 Klebemuffe
 21.090.03

	d x d ₁	PN	L	Z	Fig	g
R	16 X 12	16	14	2	A	1
IFR	20 X 16	16	16	2	A	3
IFR	25 X 20	16	19	3	A	5
IR	32 X 20	16	22	6	A	15
IFR	32 X 25	16	22	3,5	A	10
IR	40 X 20	16	26	9	B	25
IR	40 X 25	16	26	7	B	24
IFR	40 X 32	16	26	4	A	17
IR	50 X 32	16	31	8,5	B	35
IFR	50 X 40	16	31	5	A	32
IR	63 X 32	16	38	16	B	73
IR	63 X 40	16	38	11,5	B	75
IFR	63 X 50	16	38	7	A	65
IR	75 X 50	16	44	13	B	120
IFR	75 X 63	16	44	6	A	85
IR	90 X 50	16	51	20	B	200
IR	90 X 63	16	51	13	B	210
IFR	90 X 75	16	51	7	A	150
IR	110 X 63	16	61	23	B	340
IR	110 X 75	16	61	17	B	360
IFR	110 X 90	16	61	9	A	270
IF	125 X 110	16	69	8	A	285
I	140 X 90	16	76	25	B	730
I	140 X 110	16	76	17	A	645
IF	140 X 125	16	76	9,5	A	350
I	160 X 90	16	86	35	B	1040
I	160 X 110	16	86	24	B	945
IF	160 X 140	16	86	10	A	565

250 X 160	10	132	45	B	3100
250 X 200	10	132	25	A	3500
250 X 225	10	132	12	A	2100
280 x 225	10	147	27	B	4300
315 x 200	10	165	58	B	8650
315 x 225	10	165	45	B	8100
315 x 250	10	165	33	B	5080
315 x 280	10	165	18	A	4590