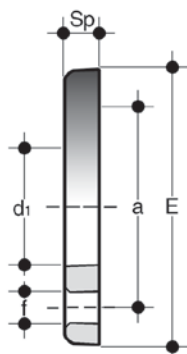


FLANGIA LIBERA

per collari d'appoggio QGV, QPV, QRV, QFV, QLV: forature DIN 8063 - UNI 2223 - DIN 2501


BACKING RING

for stub QGV, QPV, QRV, QFV or QLV: drilled DIN 8063 UNI 2223 - DIN 2501

BRIDE LIBRE

pour collets QGV, QPV, QRV, QFV ou QLV: perçage DIN 8063, UNI 2223 - DIN 2501

FLANSCH 21.070.00 Anschlußmaße DIN 2501, PN 10 für Bundbuchsen-Kombinationen 21.080.01/21.081.01

	DN	d	PMA *[bar]	E	d1	a	Sp	f	U	b	g
	15	20	10	96	28	65	11	14	4	M12 x 70	60
IR	20	25	10	107	34	75	12	14	4	M12 x 70	85
IR	25	32	10	117	42	85	14	14	4	M12 x 70	120
IR	32	40	10	143	51	100	15	18	4	M16 x 85	190
IR	40	50	10	153	62	110	16	18	4	M16 x 85	225
IR	50	63	10	168	78	125	18	18	4	M16 x 95	280
IR	65	75	10	188	92	145	19	18	4	M16 x 95	390
IR	80	90	10	203	109	160	20	18	8	M16 x 105	460
IR	100	110	10	222	132	180	22	18	8	M16 x 105	515
IR	110	125	10	230	149	190	24	18	8	M16 x 115	530
I	125	140	10	251	166	210	26	18	8	M16 x 120	715
I	150	160	10	290	189	240	29	22	8	M20 x 135	915
I	200	200	10	340	235	295	30	22	8	M20 x 140	1210
	200	225	10	340	252	295	30	22	8	M20 x 140	1090
	250	250	10	396	278	350	34	22	12	M20 x 150	1790
	250	280	10	396	309	350	35	22	12	M20 x 160	1880
	300	315	10	465	349	400	40	22	12	M20 x 180	3050

I: IIP 122 R: RINA

Foratura:

- PN 10/16 fino a DN ≤150
- PN 10 per DN ≥ 200
in accordo a DIN 8063, UNI 2223 e DIN 2501.

Drilled:

- PN 10/16 up to DN ≤150
- PN 10 for DN ≥ 200
according to DIN 8063, UNI 2223 and DIN 2501.

Perçage:

- PN 10/16 jusqu'à DN ≤150
- PN 10 pour DN ≥ 200
suivant DIN 8063, UNI 2223 et DIN 2501.

Gebohrt:

- PN 10/16 für DN ≤150
- PN 10 für DN ≥ 200
nach DIN 8063, UNI 2223 und DIN 2501.

* PMA: pressione di esercizio massima ammissibile

* PMA: allowable maximum operating pressure

* PMA: pression maximale admissible

* PMA: Höchster zulässiger Betriebsdruck